


PRELIMINARY DRAWING


DIMENSIONS

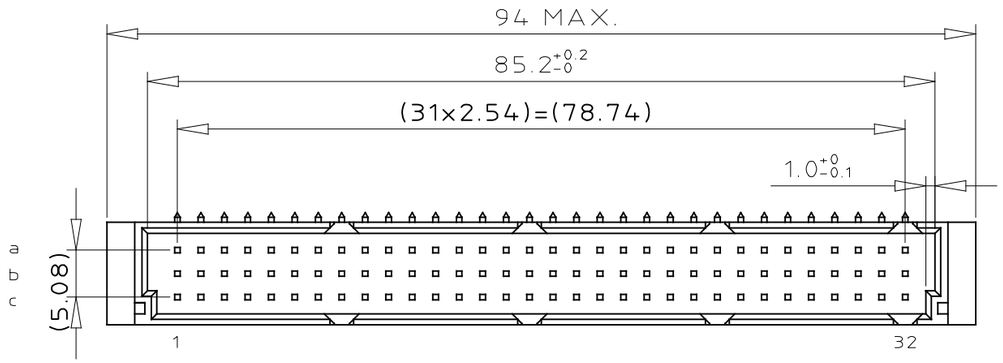

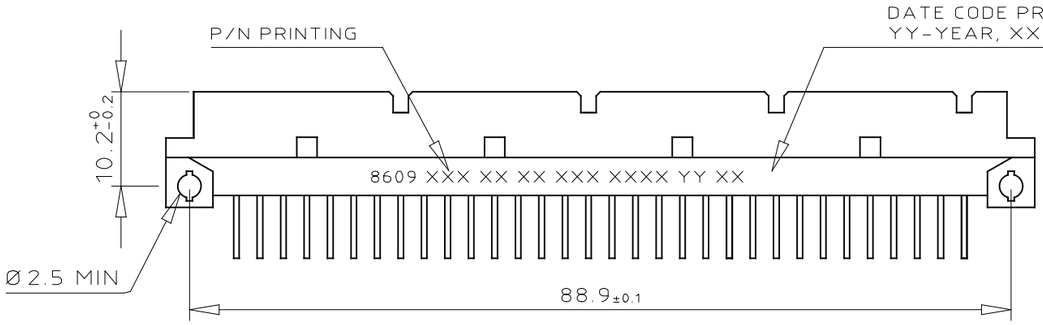




TERMINATION

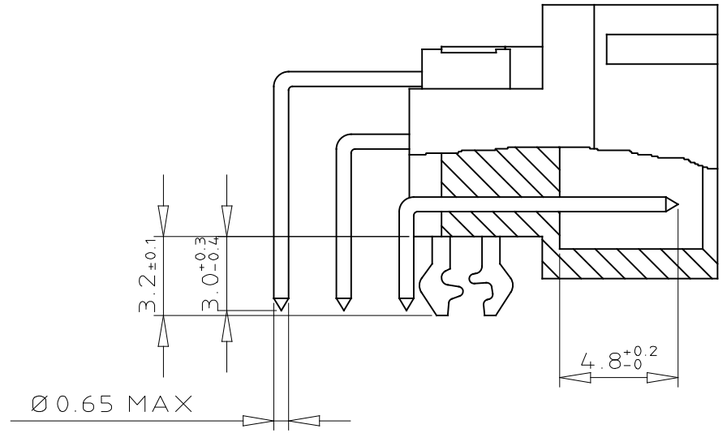

PCB LAYOUT

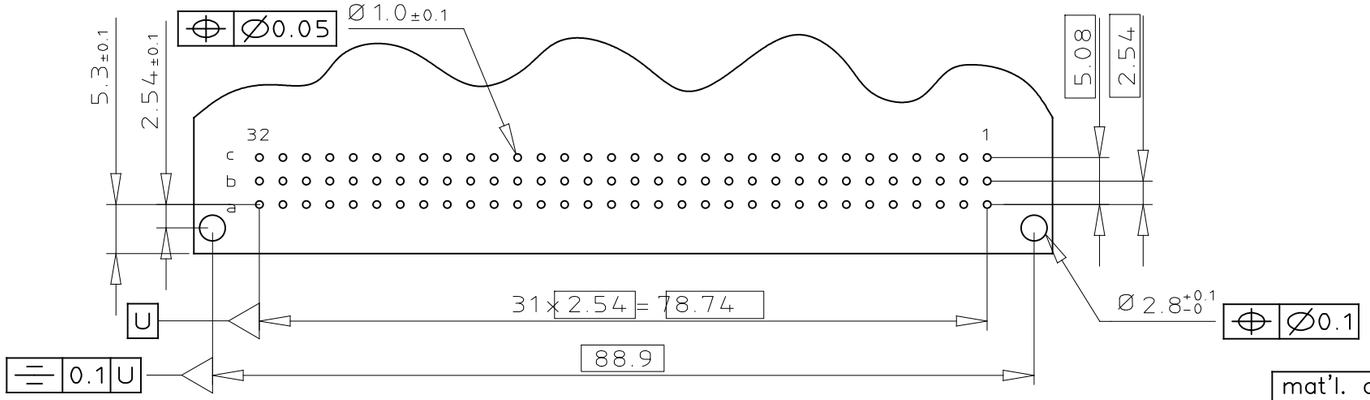

ORDERING INFORMATION

SERIES	8609	3	96	7	1	13	7	5	5	G1LF

ROWS FITTED WITH CONTACTS
- ROW a b c . . . . . 3 — 96
- ROW a - c . . . . . 4 — 64
- ROW - b - . . . . . 5 — 32

NO. OF CONTACTS

TYPE OF INSULATOR
- 3 ROW MALE INSULATOR 7

METHOD OF MOUNTING
- STANDARD MOUNTING - STYLE C 1

TERMINATION
- ANGLED SPILL 13

OPTIONS
- NO OPTION 7
- WITH HARPOONS . . . . . H

PERFORMANCE CLASS
- DIN 41612 CLASS 3 4
- DIN 41612 CLASS 2 5
- DIN 41612 CLASS 1 6
- AS PER MIL C 55302 / JSS 50808 8

PITCH PER ROW
- 2.54 mm 5

SPL CODE : GOLD PLATING ON CONTACT AREA G1LF

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

mat'l. code: SEE DRAWING C-8609-0000A				surface: ISO 1302	tolerance: ISO 406 ISO 1101	projection	product family: 8609
ltr	ecn no	dr	date	tolerances unless otherwise specified			title: DIN STANDARD HEADER DIN 41612 STYLE C
1	-	MJA	2023-03-23	angles	linear: 0.X ±0.1	mm	
-	-	-	-		0.XX ±0.1		
-	-	-	-	0°±2°	0.XXX ±0.1	scale 3:2	
-	-	-	-	dr M JACOB	2023-03-23	Amphenol FCi	dwg no C-8609-2429
-	-	-	-	engr M JACOB	2023-03-23		sheet 1 of 1
-	-	-	-	chr M JACOB	2023-03-23		size A3
				appd SANOJ	2023-03-23		type Product Customer Drawing
sheet index	revision	1					
	sheet	1					

Copyright AFCI

form: A3