
A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

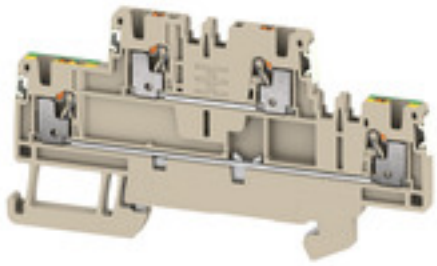

Spring connection with PUSH IN Technology
The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

General ordering data

Version	Feed-through terminal, Double-tier terminal, PUSH IN, 1.5 mm², 500 V, dark beige
Order No.	2675080000
Type	A2T 1.5 FT-PE DL
GTIN (EAN)	4050118716023
Qty.	50 pc(s).

A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth including DIN rail	46 mm	Width	3.5 mm
Width (inches)	0.138 inch	Net weight	11.9 g

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

Material data

Colour	dark beige	UL 94 flammability rating	V-0

Rating data IECEx/ATEX

Certificate No. (ATEX)	TUEV16ATEX7909U	Certificate No. (IECEX)	IECEXTUR16.0036U
Max. voltage (ATEX)	440 V	Current (ATEX)	13.5 A
Wire cross section max. (ATEX)	1.5 mm²	Max. voltage (IECEX)	440 V
Current (IECEX)	13.5 A	Wire cross section max. (IECEX)	1.5 mm²

System specifications

Number of potentials	2	Number of potentials per tier	1
Rail	TS 35		

Additional technical data

Open sides	right

Conductors for clamping (rated connection)

Blade size	0.4 x 2.0 mm		
Clamping range, max.	1.5 mm²		
Clamping range, min.	0.14 mm²		
Connection cross-section, stranded, max.	1.5 mm²		
Connection cross-section, stranded, min.	0.5 mm²		
Gauge to IEC 60947-1	A1		
Stripping length	8 mm		
Tube length for wire-end ferrule with plastic collar DIN 46228/4	Tube length	max.	8 mm
		min.	6 mm
	Cross-section for conductor connection	min.	0.14 mm²
		max.	0.75 mm²
Tube length for wire-end ferrule without plastic collar DIN 46228/1	Tube length	min.	5 mm
	Cross-section for conductor connection	nominal	0.25 mm²
	Tube length	nominal	6 mm
	Cross-section for conductor connection	min.	0.5 mm²
		max.	1 mm²
	Tube length	nominal	10 mm
	Cross-section for conductor connection	nominal	1.5 mm²
Type of connection	PUSH IN		
Wire connection cross section AWG, max.	AWG 14		
Wire connection cross section AWG, min.	AWG 26		

A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Wire connection cross section, finely stranded, max.	1.5 mm²
Wire connection cross section, finely stranded, min.	0.5 mm²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	1.5 mm²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	1 mm²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm²
Wire connection cross-section, solid core, max.	1.5 mm²
Wire connection cross-section, solid core, min.	0.5 mm²

General

Rail	TS 35	Standards	IEC 60947-7-1, IEC 60947-7-2
Wire connection cross section AWG, max.	AWG 14	Wire connection cross section AWG, min.	AWG 26

Rating data

Rated cross-section	1.5 mm²	Rated voltage	500 V
Rated DC voltage	500 V	Current at maximum wires	16 A
Standards	IEC 60947-7-1, IEC 60947-7-2	Volume resistance according to IEC 60947-7-x	1.83 mΩ
Rated impulse withstand voltage	6 kV	Power loss in accordance with IEC 60947-7-x	0.56 W
Pollution severity	3	Surge voltage category	III

UL rating data

Certificate No. (cURus)	E60693	Conductor size Factory wiring max. (cURus)	14 AWG
Conductor size Factory wiring min. (cURus)	26 AWG	Conductor size Field wiring max. (cURus)	14 AWG
Conductor size Field wiring min. (cURus)	26 AWG	Current size B (cURus)	13 A
Current size C (cURus)	13 A	Current size D (cURus)	5 A
Voltage size B (cURus)	300 V	Voltage size C (cURus)	300 V
Voltage size D (cURus)	600 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ETIM 9.0	EC000897
ECLASS 9.0	27-14-11-20	ECLASS 9.1	27-14-11-20
ECLASS 10.0	27-14-11-20	ECLASS 11.0	27-14-11-20
ECLASS 12.0	27-14-11-20	ECLASS 13.0	27250101

A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Approvals

Approvals	
ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E60693
Certificate No. (cURusEX)	E184763

Downloads


Approval/Certificate/Document of Conformity	Attestation of Conformity UKCA Ex Certificate CE Declaration of Conformity UKCA declaration of conformity Confirmation of Standards EN 45545-2_2020-10
Engineering Data	CAD data – STEP
Catalogues	Catalogues in PDF-format


A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

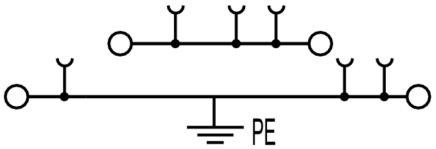

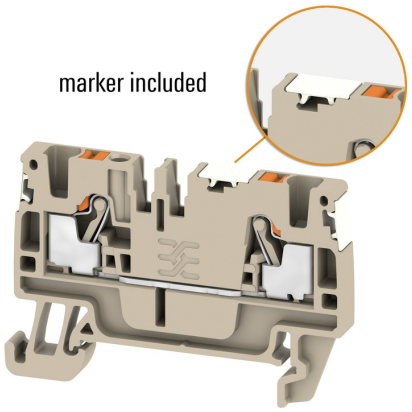

A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

A-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

Type	AEB 35 SCL/1 V0 GY	Version
Order No.	2661290000	A-series, End bracket
GTIN (EAN)	4050118702170	
Qty.	20 pc(s).	


Type	AEB 35 SC/1	Version
Order No.	1991920000	A-series, End bracket
GTIN (EAN)	4050118376722	
Qty.	50 pc(s).	

Type	AEB 35 SC/1 BK	Version
Order No.	2475310000	A-series, End bracket
GTIN (EAN)	4050118487114	
Qty.	50 pc(s).	

Type	AEB 35 SCL/1 V0	Version
Order No.	2661280000	A-series, End bracket
GTIN (EAN)	4050118702163	
Qty.	20 pc(s).	

Type	AEB 35 SCL/1 V0 BK	Version
Order No.	2661300000	A-series, End bracket
GTIN (EAN)	4050118702187	
Qty.	20 pc(s).	

Slotted screwdriver



VDE insulated slot-head screwdriver, SDI DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip

General ordering data

Type	SDIS 0.4X2.0X60	Version
Order No.	9205690000	Screwdriver, Screwdriver
GTIN (EAN)	4032248772995	
Qty.	1 pc(s).	

A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

1.5 mm²



The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

General ordering data

Type	ZQV 1.5N/7
Order No.	1985520000
GTIN (EAN)	4050118370195
Qty.	20 pc(s).

Type	ZQV 1.5N/10
Order No.	1985580000
GTIN (EAN)	4050118370416
Qty.	20 pc(s).

Type	ZQV 1.5N/4 BL
Order No.	1985570000
GTIN (EAN)	4050118370317
Qty.	60 pc(s).

Type	ZQV 1.5N/8 BL
Order No.	1985640000
GTIN (EAN)	4050118370461
Qty.	20 pc(s).

Type	ZQV 1.5N/3
Order No.	1985480000
GTIN (EAN)	4050118370096
Qty.	60 pc(s).

Type	ZQV 1.5N/9
Order No.	1985560000
GTIN (EAN)	4050118370409
Qty.	20 pc(s).

Type	ZQV 1.5N/7 RD
Order No.	1985750000
GTIN (EAN)	4050118370249
Qty.	20 pc(s).

Type	ZQV 1.5N/3 RD
Order No.	1985670000
GTIN (EAN)	4050118370348
Qty.	60 pc(s).

Type	ZQV 1.5N/10 RD
Order No.	1985800000
GTIN (EAN)	4050118370393
Qty.	20 pc(s).

Type	ZQV 1.5N/5 BL
Order No.	1985590000
GTIN (EAN)	4050118370430
Qty.	20 pc(s).

A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

Type	ZQV 1.5N/8
Order No.	1985540000
GTIN (EAN)	4050118370218
Qty.	20 pc(s).
Type	ZQV 1.5N/20 BL
Order No.	1985700000
GTIN (EAN)	4050118370331
Qty.	20 pc(s).
Type	ZQV 1.5N/2 BL
Order No.	1985530000
GTIN (EAN)	4050118370423
Qty.	60 pc(s).
Type	ZQV 1.5N/2
Order No.	1985410000
GTIN (EAN)	4050118369861
Qty.	60 pc(s).
Type	ZQV 1.5N/50
Order No.	1985620000
GTIN (EAN)	4050118370300
Qty.	5 pc(s).
Type	ZQV 1.5N/7 BL
Order No.	1985630000
GTIN (EAN)	4050118370522
Qty.	20 pc(s).
Type	ZQV 1.5N/8 RD
Order No.	1985770000
GTIN (EAN)	4050118370508
Qty.	20 pc(s).
Type	ZQV 1.5N/10 BL
Order No.	1985680000
GTIN (EAN)	4050118370539
Qty.	20 pc(s).
Type	ZQV 1.5N/20
Order No.	1985600000
GTIN (EAN)	4050118370225
Qty.	20 pc(s).
Type	ZQV 1.5N/4
Order No.	1985490000
GTIN (EAN)	4050118370201
Qty.	60 pc(s).
Type	ZQV 1.5N/20 RD
Order No.	1985810000
GTIN (EAN)	4050118370355
Qty.	20 pc(s).
Type	ZQV 1.5N/6 RD
Order No.	1985730000
GTIN (EAN)	4050118370454
Qty.	20 pc(s).
Type	ZQV 1.5N/4 RD
Order No.	1985690000
GTIN (EAN)	4050118370515
Qty.	60 pc(s).

A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

Type	ZQV 1.5N/6 BL
Order No.	1985610000
GTIN (EAN)	4050118370492
Qty.	20 pc(s).
Type	ZQV 1.5N/9 BL
Order No.	1985660000
GTIN (EAN)	4050118370478
Qty.	20 pc(s).
Type	ZQV 1.5N/5
Order No.	1985500000
GTIN (EAN)	4050118369991
Qty.	20 pc(s).
Type	ZQV 1.5N/6
Order No.	1985510000
GTIN (EAN)	4050118370188
Qty.	20 pc(s).
Type	ZQV 1.5N/9 RD
Order No.	1985790000
GTIN (EAN)	4050118370386
Qty.	20 pc(s).
Type	ZQV 1.5N/5 RD
Order No.	1985710000
GTIN (EAN)	4050118370256
Qty.	20 pc(s).
Type	ZQV 1.5N/2 RD
Order No.	1985650000
GTIN (EAN)	4050118370324
Qty.	60 pc(s).
Type	ZQV 1.5N/3 BL
Order No.	1985550000
GTIN (EAN)	4050118370485
Qty.	60 pc(s).
Type	ZQV 1.5N/50 BL
Order No.	1985720000
GTIN (EAN)	4050118370546
Qty.	5 pc(s).
Type	ZQV 1.5N/50 RD
Order No.	1985820000
GTIN (EAN)	4050118370270
Qty.	5 pc(s).

A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

A-Series



A partition plate is used for the optical separation of circuits or used for electrical isolation from neighbouring cross-connectors. In contrast to the end plate, the contour can be larger than the adjacent terminal blocks. However, it should not be smaller, as otherwise the required clearance and creepage distances within the application can no longer be maintained.

General ordering data

Type	APP 4	Version
Order No.	2489110000	A-series, Partition plate
GTIN (EAN)	4050118499322	
Qty.	50 pc(s).	

A-Series



Warning covers with a flash symbol provide more safety for man and machine. They are used where external voltage must be indicated within the application.

General ordering data

Type	AAM 1.5 YE FLASH	Version
Order No.	2635520000	Terminal marker, 6.2 x 3.5 mm, Pitch in mm (P): 3.50 yellow
GTIN (EAN)	4050118674088	
Qty.	40 pc(s).	

A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

Digital multimeters



Multimeters are capable of measuring a number of variables. Each instrument can measure voltage and resistance, as well as performing continuity and diode testing as standard.
In addition, the individual multimeters also feature extra measuring options such as current, frequency, capacitance and temperature. Digital multimeters have the advantage of a clear display which can be read easily and directly. With these instruments, mistakes arising from faulty conversion of the measuring ranges or misreading the display are a thing of the past.

General ordering data

Type	ZUB MULTIMETER	Version
Order No.	9205270000	Multimeter
GTIN (EAN)	4032248723522	
Qty.	1 pc(s).	

A-Series



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

General ordering data

Type	ATPG 1.5 MI-R
Order No.	1991880000
GTIN (EAN)	4050118376715
Qty.	50 pc(s).

Type	ATPG 1.5-10 L
Order No.	1991890000
GTIN (EAN)	4050118376647
Qty.	50 pc(s).


A2T 1.5 FT-PE DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

SnapMark



SnapMark - this tag carrier has been developed especifically for the I-series double-level terminal IDK 1.5N. The flexible pivot mechanism allows cross-connections to be easily installed or removed. It can hold four DEK 5 labelling tags or two WS 10/5 Middle connector markers.

General ordering data

Type	SNAPMARK 1.5	Version
Order No.	2682080000	Group markers, Terminal marker, 26 x 3.5 mm, Pitch in mm (P): 3.50
GTIN (EAN)	4050118821772	Weidmueller, white
Qty.	40 pc(s).	

1.5 mm²



End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

General ordering data

Type	AEP 2T 1.5 BL	Version
Order No.	2471470000	A-series, End plate
GTIN (EAN)	4050118562293	
Qty.	20 pc(s).	

Type	AEP 2T 1.5	Version
Order No.	2469420000	A-series, End plate
GTIN (EAN)	4050118562255	
Qty.	20 pc(s).	